A dynamic, high-contrast image of water splashing upwards, filled with numerous small and large blue bubbles of varying sizes.

**CapDI[®] SYSTEMS
TECHNICAL SPECIFICATIONS**

WWW.VOLTEA.COM

CapDI®

Voltea CapDI Membrane Capacitive Deionization



We specialize in tunable water purification that is designed to remove total dissolved salts (TDS) from a variety of water sources, ranging from tap water and brackish groundwater to industrial process water. CapDI achieves this at a lower economic cost and reduced environmental impact than any other available technology.

Voltea's CapDI technology purifies water types ranging from residential consumer appliances to large-scale industrial plants. Our systems are modular, allowing easy expansion to meet any increased water demands.

CapDI Benefits

- Automated cleaning
- Remote monitoring available
- High water recovery, up to 90 %
- Tunable TDS reduction, up to 90 %
- Complete system monitoring and feedback
- Dynamic Control - controlled output water quality
- Customizable system sizing to reach client needs
- Operation at high temperatures, up to 60 °C (140 °F)
- Low energy usage, 0,4 - 0,8 kWh/m³ (1.5 - 3.0 kWh/kgal)
- Patented Membrane Capacitive Deionization Technology

Quality Assurance

- CE Certified
- UL on request
- Factory Acceptance Test on request
- Systems and modules quality control tested
- Voltea Remote Monitoring and Control package



Feed Water Quality

PARAMETER	UNIT	RANGE	INTERMITTENT
Removal Limit	Δppm	0 - 2000	
Total Dissolved Solids (TDS)	ppm	0 - 4000	
Total Organic Carbon	ppm	< 15	
Chemical Oxygen Demand	ppm	< 50	< 100
Turbidity	NTU	< 4	< 100
Fats, Oils, Greases	ppm	< 0.5	
Total Suspended Solids (TSS)	ppm	< 4	< 20
Free Chlorine	ppm	< 1	< 25
pH	-	2 - 10	1 - 12
Iron total	ppm	< 0.5	
Total Hardness (CaCO ₃)*	ppm	< 1000	
M Alkalinity (as CaCO ₃)*	ppm	< 1000	
Pre-filtration	µm	5	
Temperature	°C	1 - 60	
Chemicals	-	Contact Voltea	

* Limits depend on set TDS reduction and water recovery

IS-6H

CapDI IS-6H Industrial Series 3-6 Module Skid



Design and Scope of Supply

- IS System User Manual
- Capable of ambient or high temperature feed water
- Built-in monitoring; flow, pressure, conductivity, module voltage
- Skids can take up to full accompaniment of modules

IS Features

- Voltea Remote Monitoring and Control available
 - Automated System CIP (Clean-In-Place); chemical and/or air
- | | |
|---------------------------------------|------------------------------|
| Inlet/Pure Outlet Conductivity Meters | 0 - 10 mS/cm |
| Total Flow Meter | 9 - 150 L/min (2.4 - 40 gpm) |
| System Pressure | 0 - 10 bar (0 - 145 PSI) |
| Module Pressure | 0 - 6 bar (0 - 87 PSI) |
| User Interface | HMI Panel |

Performance

Net Produced Flow	0,5 - 3 m ³ /h (2.2 - 13.2 gpm)
Salt Removal	25 - 90 %
Water Recovery	40 - 90 %

System Specification

Input Power Requirements*	1-ph 5.7 kW, 110 (or 230, please specify) V AC, 50 - 60 Hz
System Dimensions (L x W x H)	1,15 x 0,9 x 1,66 m (3'9" x 2'11" x 5'6")
Service Space	0,8 m (2'7") from edge of system
Weight**	400 kg (880 lbs)
Feed Inlet Coupling	1" union
Product Outlet Coupling	1" union
Concentrate/Waste Outlet Coupling	1" union

Operational Requirements

Water Feed Pressure	3 bar (44 PSI) at the flow rate required, max 6 bar (87 PSI)
Water Temperature	1 - 60 °C (34 - 140 °F)
Compressed Air Line	100 L/min (3.5 CFM) @ 6 bar (87 PSI), pneumatic, size 3/8"
Operating Ambient Air Temperature***	< 25 °C (< 77 °F)

Inputs/ Outputs

Start / Stop	Input - Potential free contact (0 - 30 V DC / 0 - 250 V AC, 0 - 5 A)
External Pump	Output - Potential free contact (24 V DC)

*Actual power consumption will depend on module and settings used (typically 30-60% of input power requirement).

**Weight without modules

***Without added cooling



IS-6H Process Flow Diagram

Valves

ASIV : Air Scour Inlet Valve
 ASWV: Air Scour Waste Valve

AV: Air Valve

BPV: Bypass (CIP Recirculation) Valve

CV : Check Valve

FOV: Fill out Valve

ISV: Inlet Sample Valve

MIV : Main Inlet valve

PSV: Pure Sample Valve

POV : Pure Outlet valve

WOV: Waste Outlet valve

FR1 : Flow restrictor (default 10 lpm [2.6 gpm])

FR2 : Flow restrictor (default 2.0 lpm [0.5 gpm])

Sensors

FM : Flowmeter


P_{in} : System Pressure Sensor 10 bar (145 psi)

P_m : Module Pressure Sensor 6 bar (87 psi)


PS3 : Pressure Switch 2.0 bar (29 psi)

EC_{in} : Inlet Conductivity probe


EC_{out} : Out let Conductivity probe

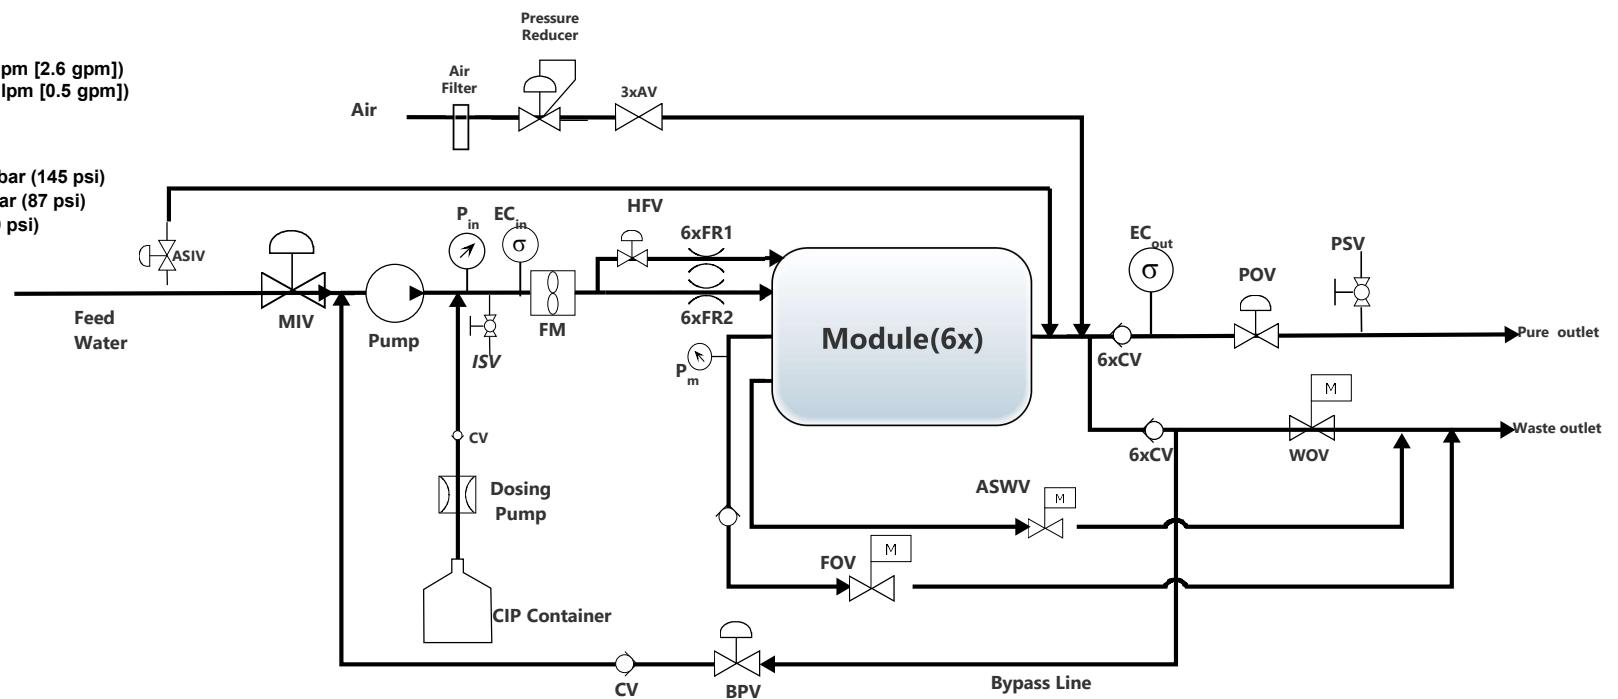

IS-6H

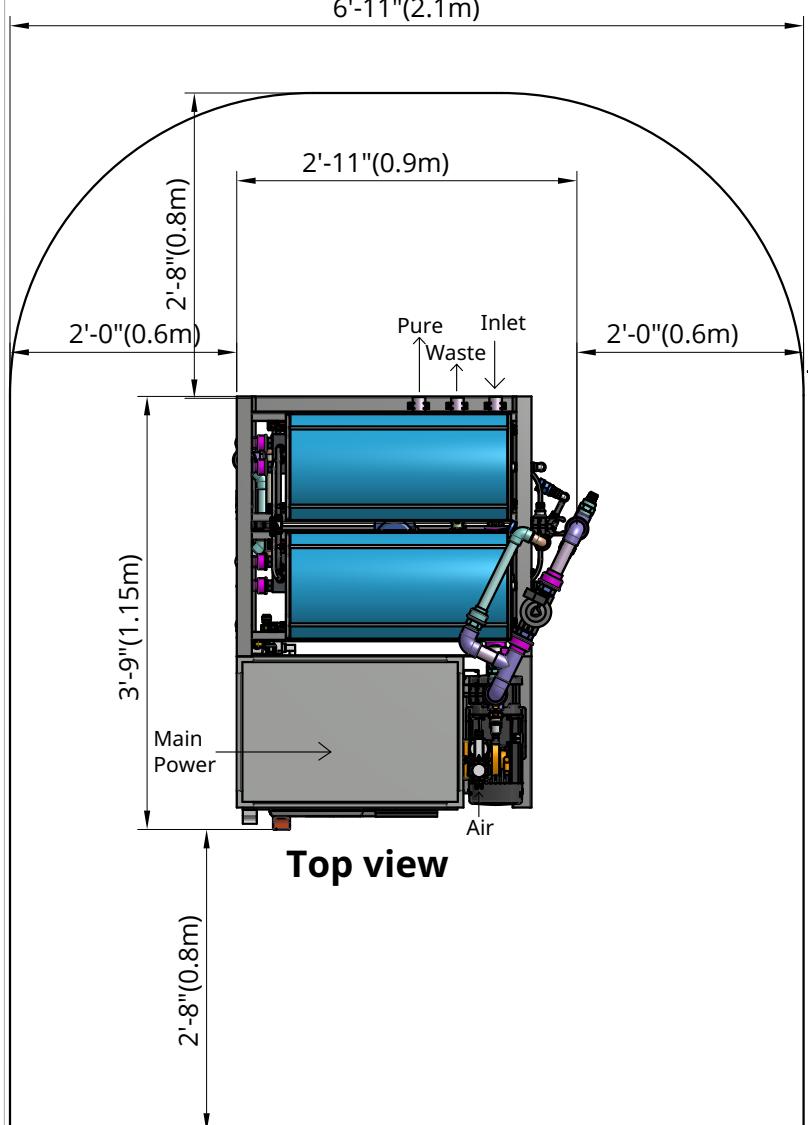


1:20

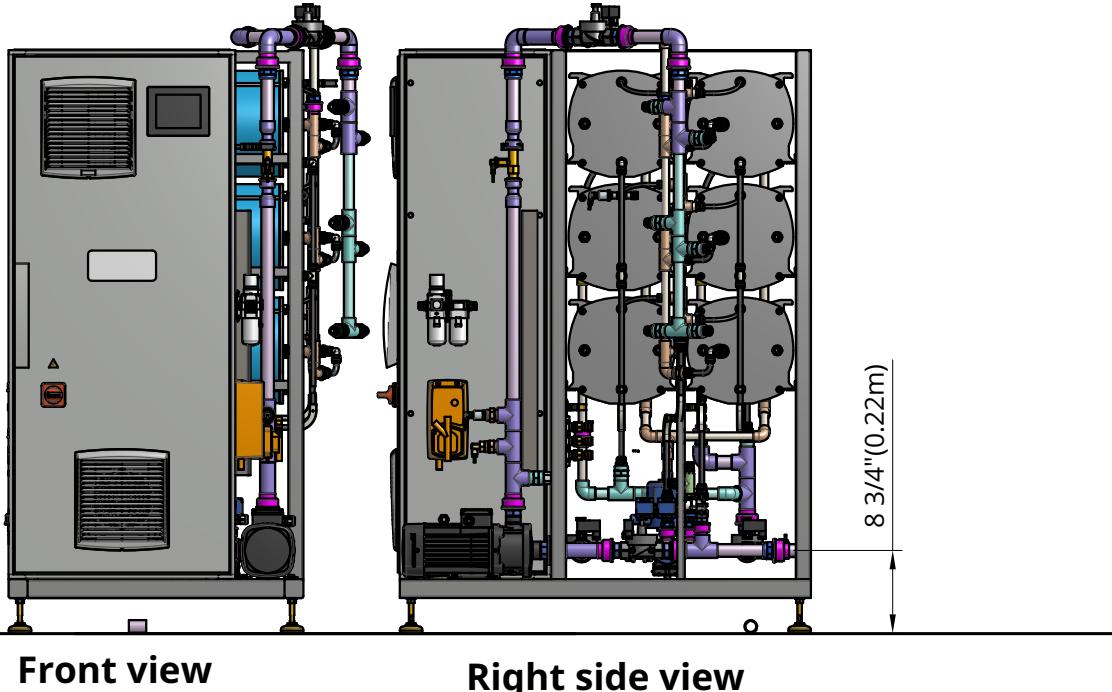

Front view

Right side view

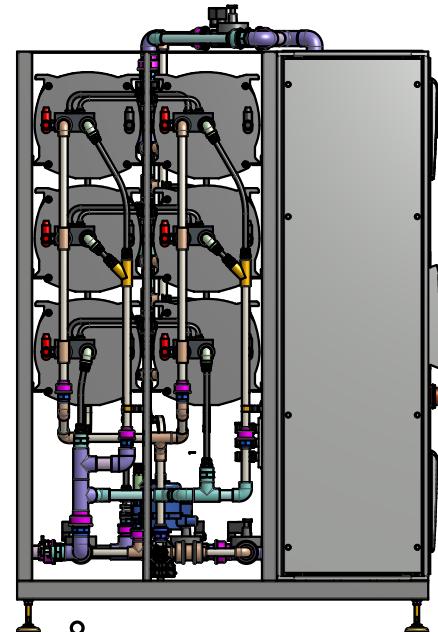

Left side view